

THE CSV

CONTROL THROUGH CONNECTIVITY

The Control Speed Vibrator (CSV) electric flex shaft concrete vibrator enables contractors to choose between the set speeds of 6,000, 8,000, 10,500, and 12,500 VPM via a blue tooth Minnich app on ISO or Android platforms. Once the speed is chosen the CSV will maintain that speed as concrete load changes. The CSV is a lightweight, durable, 15 amp (115-volt) universal motor that drives a full line of Minnich shafts and heads. The unit comes standard with a quick disconnect. Optional quick disconnect that adapts to the shafts and heads of other manufacturers are available. The Minnich CSV was designed to run at a lower amp range making the motor more efficient than other on the market. Minnich utilizes a durable frame to extend the vibrator's life. The lightweight motor and frame-handle positions offer many ergonomic user features and comes with a shoulder harness.

The CSV motor has been designed with a "soft start" that saves energy and mechanical wear on the motor and power system.

FEATURES

Light Weight - 14.5 LBS
Shock Absorbing Protective Frame
OSHA Noise Compliant
Long Product Life Due To Speed Control

BENEFITS

Has Required Speeds For ASSHTO Tests Changes The Compatible Speed With Your Concrete Mix

Shock Absorbing Protective Frame



Quick Disconnect Double Insulated Motor

PRODUCT SPECIFICATIONS FOR AASHTO TESTS


TEST	MOTOR MODEL	HEAD SIZE	SHAFT LENGTH	VIBRATOR SPEED
V KELLY	CSD - 1	3/4"	5 ft	8000 VPM
BOX TEST	CSD - 1	1 1/8"	5 ft	12,500 VPM




ELECTRIC MOTORS

	DESCRIPTION	MODEL NO.
	Motor, Flex Shaft 115V 15 AMP	S-D1
Minuch 2	Motor, Flex Shaft 115V 15 AMP *CS	CS-D1
	*Control Speed	

FLEX-SHAFT CORE & CASING

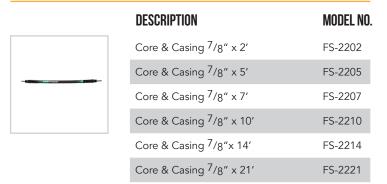

FLEX-SHAFT CORE & CASING



DESCRIPTION	MODEL NO.
Core & Casing 1 ³ / ₁₆ " x 2'	FS-8102
Core & Casing 1 ³ / ₁₆ " x 5'	FS-8105
Core & Casing 1 ³ /16" x 7'	FS-8107
Core & Casing 1 ³ /16" x 10'	FS-8110
Core & Casing 1 ³ /16" x 14'	FS-8114
Core & Casing 1 ³ /16" x 21'	FS-8121

VIBRATOR HEADS



DESCRIPTION	MODEL NO
Flex Shaft Head ³ /4" x 13"	VH-31
Flex Shaft Head 1" x 14"	VH-32
Flex Shaft Head 1 $^3/8" \times 14"$	VH-33
Flex Shaft Head 1 ³ /4" x 11"	VH-34
Flex Shaft Head 2" x 13"	VH-35
Flex Shaft Head 2 ³ /8" x 12"	VH-36
Tilt Up Head 2 ¹ /2" x 6"	VH-85

ELECTRIC MOTORS



DESCRIPTION	MODEL NO.
Flex Shaft Coupler	
Synthetic ATF	
Multi-Purpose Grease	

VIBRATOR HEADS



DESCRIPTION	MODEL NO.
Flex Shaft Head 1 ⁵ /8" x 13"	CVH-32
Flex Shaft Head 1 ³ /4" x 15"	CVH-33
Flex Shaft Head 2 ¹ /2" x 14"	CVH-35
Tilt Up Head 3" x 6 ¹ /2"	CVH-85

BUILDING YOUR STINGER

Poly Urethane Coated Heads Available

